

NEW

SC75EV

ELECTRIC TRACKED BUGGY

**Powerfully Electric.
Quiet Performance,
Zero Emissions!**




SC75EV

Electric Tracked Buggy


Lithium Powered!

180° Pivoting Bucket

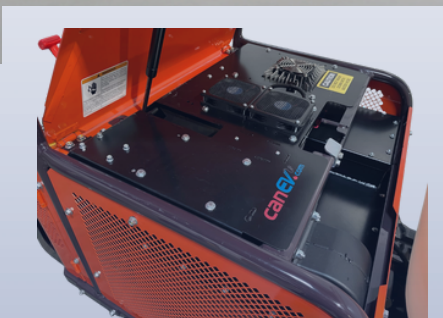


40.3kW Electric Motor

Indoors or outdoors with extreme lithium power.

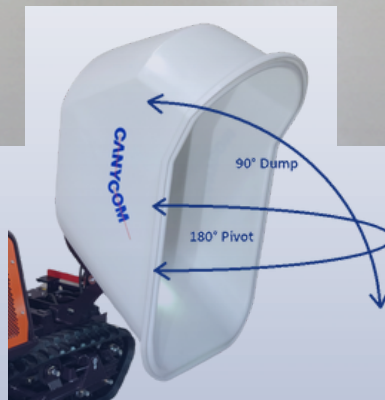

180° Pivoting 90° Dump Angle

Reach just about anywhere quickly and conveniently.

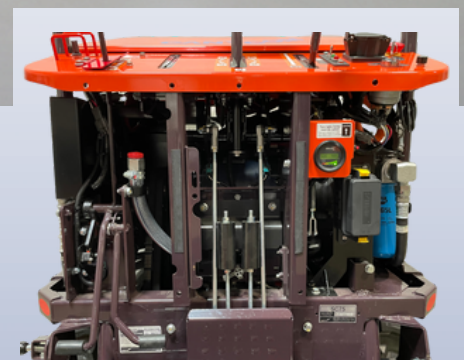


Fully-opening Access Covers

Gas-assisted cover lifts for fast inspection and maintenance, while side panels unbolt easily for 360° access.


Key Features



35-inch width for easy gate and doorway access.

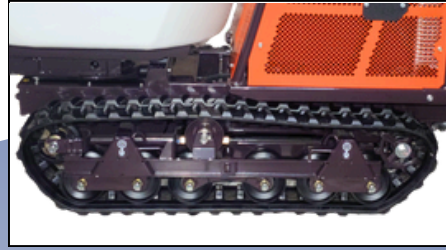

Robust, tracked undercarriage for maneuverability on any terrain.

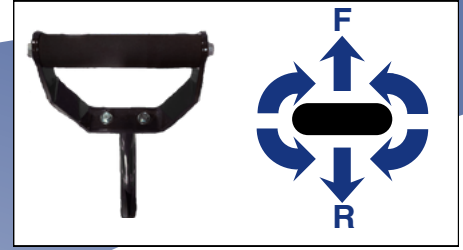

Innovative D-handle operation for precise 1-handed control.



LED headlight for operation in any environment—extremely dim or well lit.



Charges on 110V or 220V power, giving flexible options for any jobsite.



Operate with platform down or stowed.



Specifications

SC75EV					
Dimensions	Machine Weight	1,700 lbs (771 kg)	Charging	On-board Charger	3.3 kW, fan-cooled
	Length	108 in (2,743 mm)		Input Voltage	110/220 V auto-setting
	Width	35 in (889 mm)		Connector	J1772-compatible
	Height	54 in (1,372 mm)		Typical Charge Time	~5 hours (220 V, 20% → 100%)
	Tracks	200 x 42 x 72 (black, non-marking avail.)		Transmission / Steering	Twin HST; single D-handle steering
	Min. Ground Clearance	4.7 in (120 mm)		Brakes	Internally expanding
	Min. Turning Radius	4.9 ft (1.5 m)		Drivetrain	Track Size
Electric Power System	Drive Motor	Single electric motor; forced-air cooled	Travel Speed		0-6 mph (0-9.7 km/h)
	Peak Output	54 hp (40.3 kW)	Max Operating Slope		Up to 25°
	Battery Type	LiFePO ₄ (Lithium Iron Phosphate)	Payload Capacity	2,200 lbs (998 kg)	
	Battery Capacity / Voltage	21 kWh / 77 V nominal	Bucket Type	HD poly tub, steel tub option	
	Expected Runtime	6-8 hours (continuous use)	Bucket Volume	14.5 cu ft	
	Service Battery	12 V / 36 Ah	Dump Angle	90°	
	Work Lamp	12 V / 4 W LED	Bucket Swivel Radius	180° (90° left & right)	



Canycom USA, Inc.

888-450-0381

425-450-0381

info@canycomsales.com

www.canycomsales.com

